


sepioo Smart Industrial Label 2.6

Technical Details

| | |
|---|---|
| Dimensions (mm) | 80 x 41.1 x 11.4 (without LED) |
| Display technology | Full graphic E-ink display |
| Active display area (mm) | 60.1 × 30.7 |
| Resolution (pixels) | 296 × 152 |
| Pixel density | 125 dpi |
| Pixel colors | Black/white/red or Black/white - Freezer |
| Protection glass | With or without |
| Usable pages | 4 |
| Casing color | Anthracite |
| Operating temperature | 0°C to +40°C / -25°C to +30°C |
| Storage temperature (best for batteries) | -20°C to +50°C +15°C to +30°C) |

| | |
|--------------------------|---|
| Battery | 2x CR2450 |
| Battery lifetime | 10 years (7.000-10.000 updates) |
| Encryption | 128-bit AES with secure key exchange |
| Compliance | CE, ROHS, FCC/IC |
| Packaging unit | 80 labels/box |
| NFC | Yes, operating frequency: 13.56 MHz |
| Operating frequency | 2.400 - 2.480 GHz, maximum EIRP ≤ 10 mW |
| LED | 1x white / 1x RGB (red/green/ blue/ yellow/ cyan/magenta) |
| Wireless firmware update | Yes |
| Buttons | No |

Technical Drawing

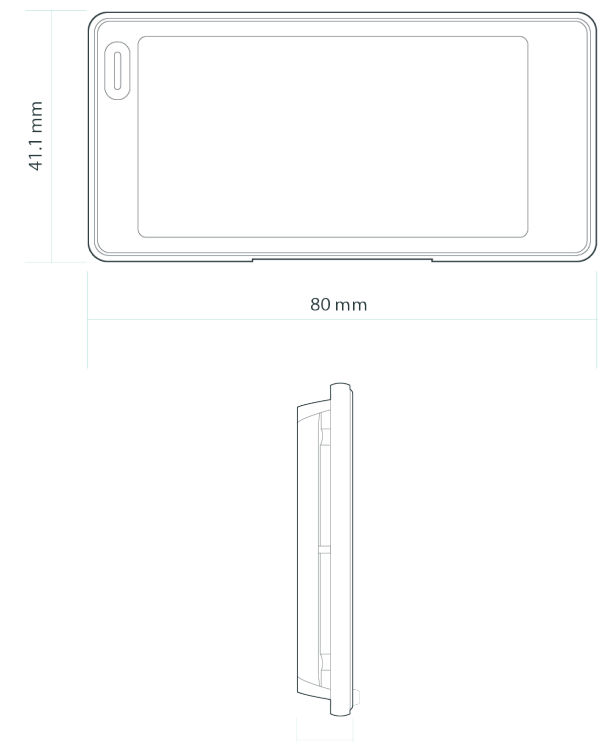

sepioo Smart Industrial Label 2.6



e-shelf-labels | S&K Solutions GmbH

Sailerwöhr 16 | 94032 Passau
+49 (0) 851 / 2009 30 30

info@e-shelf-labels.com
www.e-shelf-labels.com

a brand of  solutions

The logo for S&K solutions, featuring the letters "S" and "K" in white inside a blue circle, with the word "solutions" in a smaller font below it.